



Bateria litowa CR2032 'High Performance Battery'



Desygnacja IEC: **CR2032**

Napięcie nominalne: **3V**

Pojemność projektowana: **235 mAh**


Pojemność **220mAh**
(load 15k Ω down to 2.0V at 20°C)

Waga: **2.9 g**

Wymiary: **20 x 3.2mm**

Zakres temperatur:
przechowywanie: 0..30°C
użytkowanie/rozładowanie: -20..60°C

Discharge characteristics (load 15k Ω):

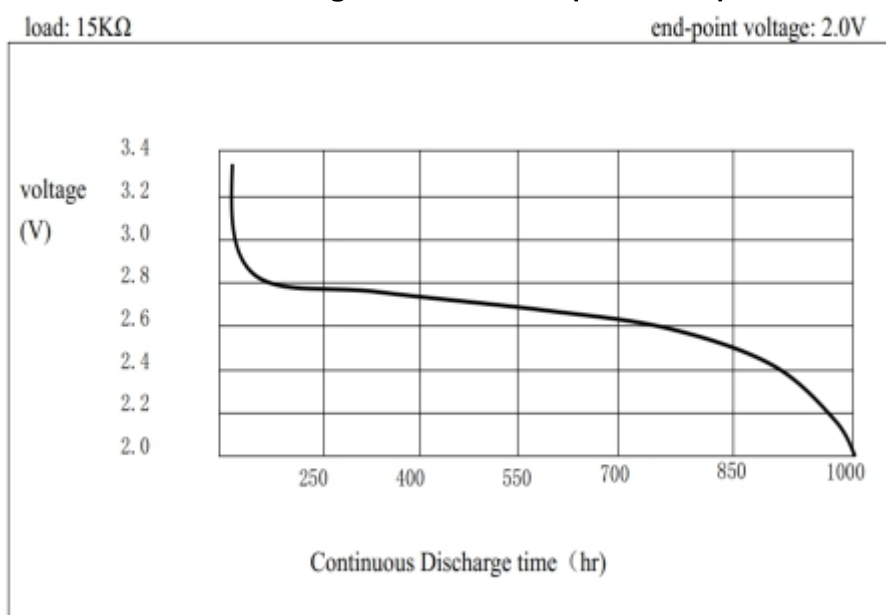

Baltrade sp. z o. o.

Geodetów 24
80-298 Gdansk, Poland
VAT EU: PL5840202116
WEEE: E0006872WBW

tel: +48 58 556 43 44
fax: +48 58 552-20-20
www.baltrade.eu
ehandel@baltrade.pl



Miejsce, data: Gdańsk, 04.02.2025



Lithium Battery CR 2032 Data-Sheet



Designation IEC: **CR2032**

Nominal voltage: **3V**

Designed capacity: **235 mAh**


Typical capacity: **220mAh**
(load 15k Ω down to 2.0V at 20°C)

Weight: **2.9 g**

Dimensions: **20 x 3.2mm**

Temperature ranges:
long-term storage: 0..30°C
application/discharge: -20..60°C

Discharge characteristics (load 15k Ω):

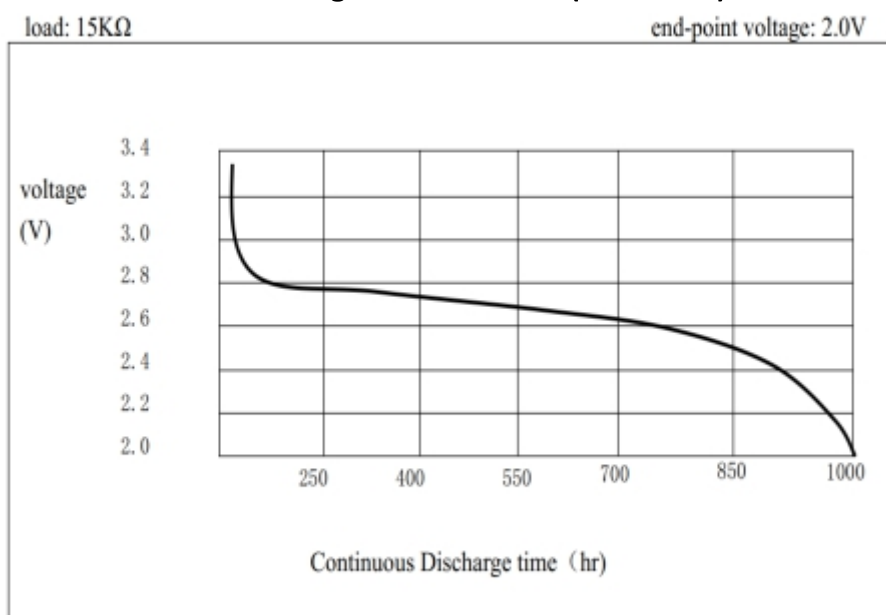

Baltrade sp. z o. o.

Geodetów 24
80-298 Gdansk, Poland
VAT EU: PL5840202116
WEEE: E0006872WBW

tel: +48 58 556 43 44
fax: +48 58 552-20-20
www.baltrade.eu
ehandel@baltrade.pl



Miejsce, data: Gdańsk, 04.02.2025